


STANDPIPE DOWNSPOUT FILTER COLLECTOR

Function: Connects to a single vertical rainwater downspout and can filter up to a 2,000 square foot roof area for irrigation, car washing or other non-potable uses. Filter can be partially buried. The standpipe downspout filter collector is installed in the vertical rainwater downspout piping partly below grade to remove debris to the storm water system and divert 95% of the clean rainwater to an underground storage tank. The filter operates as a first flush device.

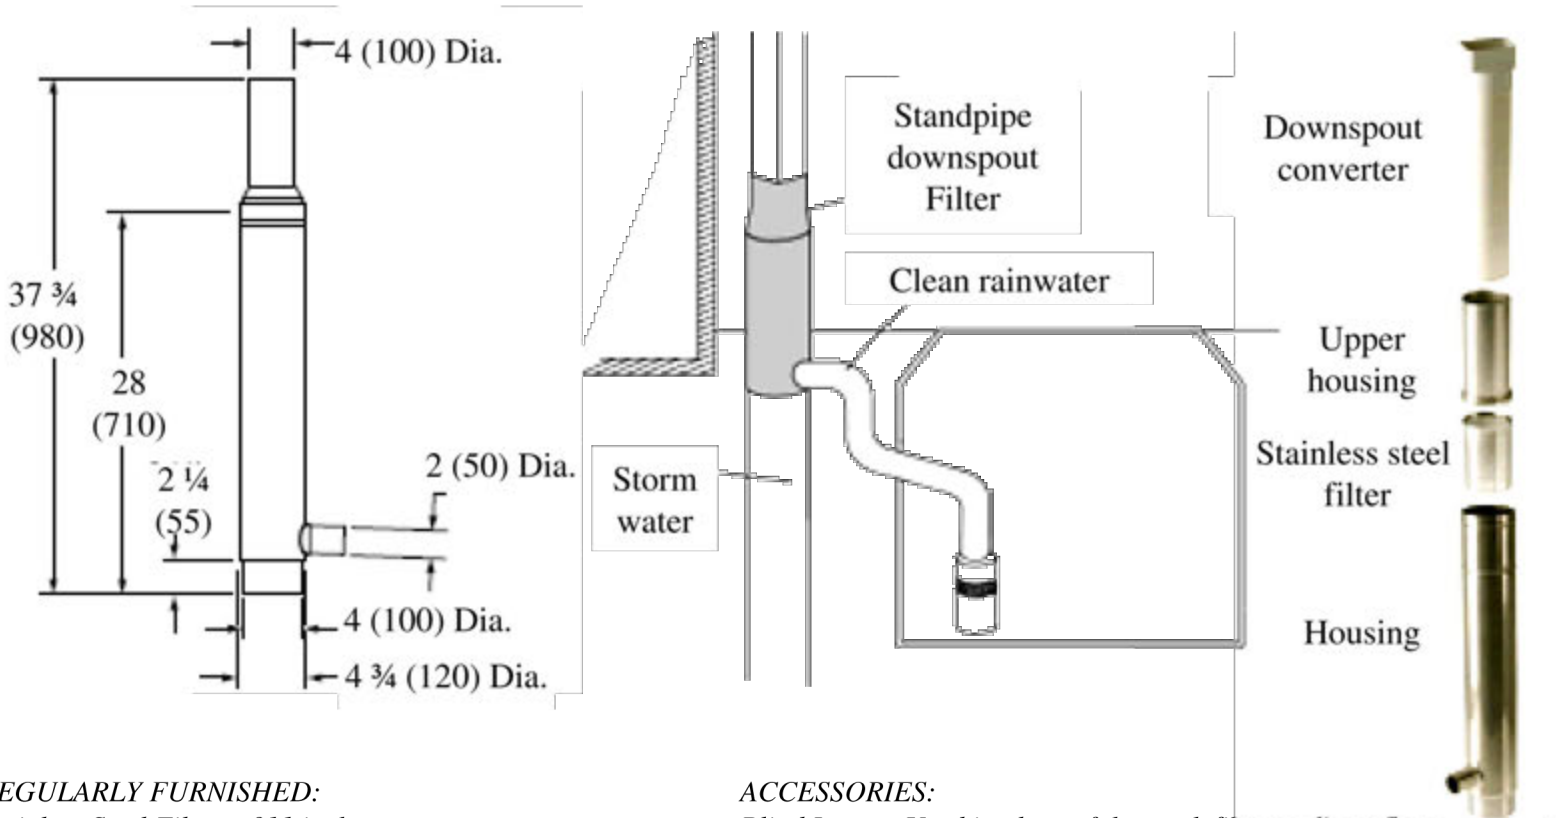

REGULARLY FURNISHED:

- Stainless Steel Filter, .011 inch
- Stainless Steel Fine Mesh Filter and
- Downspout Converter Kit (specify):
 - 2" x 3" Downspout Kit
 - 3" x 4" Downspout Kit

ACCESSORIES:

- Blind Insert - Used in place of the mesh filter to divert flow directly to the storm water system. Stainless Steel.
- 1" Flexible Hose with 2" Connection for Downspout Filter
- Downspout Clip with Screw and Wall Plug- For securing the filter unit to a wall.

NOTES: Filter Collector must be mounted plumb for proper operation.

A 90° elbow or optional 1" flexible hose (with 2" connection) must be installed directly on the 2" outlet to assure proper filtration.

A coarse mesh filter is available for areas prone to excessive particulate matter in the air, such as dust or pollen.

For a roof area above 2,000 square feet, additional standpipe downspout filter collectors should be added.

NOTE: Dimensions shown in parentheses are in millimeters.